

## ***Fiber Optic Cable Assemblies***

The following is a description of basic capabilities and suggested design specifications for use in your fiber optic cable assemblies. Aerospace Systems provides high quality fiber optic assemblies which meet or exceed MIL-STD-2042 requirements.


### **CONNECTORS**

- MIL-C-28875 connectors for multiple termini
- MIL-C-83522 connectors for single terminus
- Commercial grade ST connectors
- Commercial grade SC connectors
- Commercial grade FC APC connectors (reduced return loss)



### **CONNECTORIZATION**

- Epoxy (shipboard approved) – Most common
- Pre-loaded adhesive
- Crimp
- Chemical (ovenless)
- UV Curable

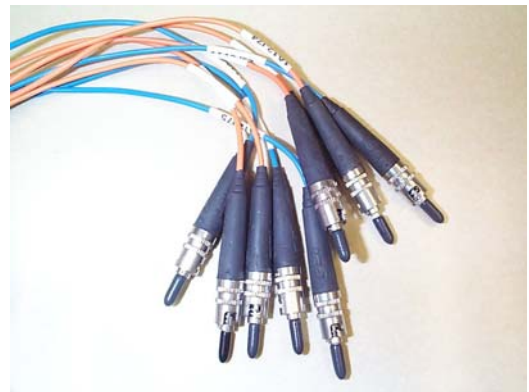

### **TERMINI**

- MIL-T-29504/14 and /15 for MIL-C-28876 connectors
- MIL-T-29504/4 and /5 for MIL-DTL-38999 connector 16 AWG contact cavities
- Non-military spec contacts for MIL-DTL-38999 connector 20 AWG contact cavities


### **POLISH TYPES**

- Physical Contact (PC) both flat and domed
- Enhanced polish
- FC APC
- Multi and single mode



**CABLE**

- MIL-PRF-8045 includes all types of cable including multiple fiber multi and single mode
- Custom hybrid cables (combined multi and single mode)
- Custom composite cables (combined optical fiber and copper conductors)
- Commercial cable

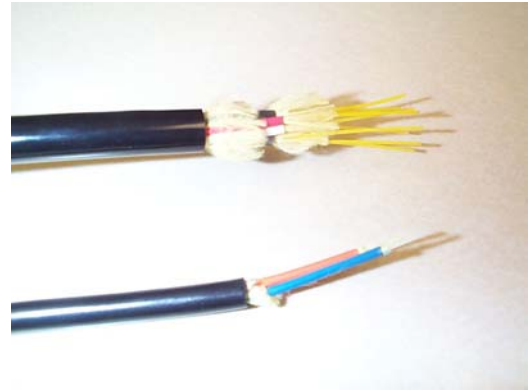

**INSPECTION/TESTING**

- 400X Visual Inspection
- Insertion loss for multi and single mode
- Return loss for single mode (+6 to -60 dbm)



**TRAINING AND METHODS**

- MIL-STD-2042 trained personnel to insure quality. All assemblies built to MIL-STD-2042 requirements.

**MOLDED STRAIN RELIEFS**

- Any type of connector can be overmolded to provide superior strain relief. With suitable connectors a waterproof, rugged fiber optic cable assembly is achievable.

